

LAUNCH AMPLIFIER



AMPLIFIER



AMPLIFIER SPLITBAND 5 ... 2400 MHz WITH GAIN CONTROL ON SAT IF & TERR RF COMBINED OUTPUT

Product Code: DS/SBV125NF

FOXTEL: F30972

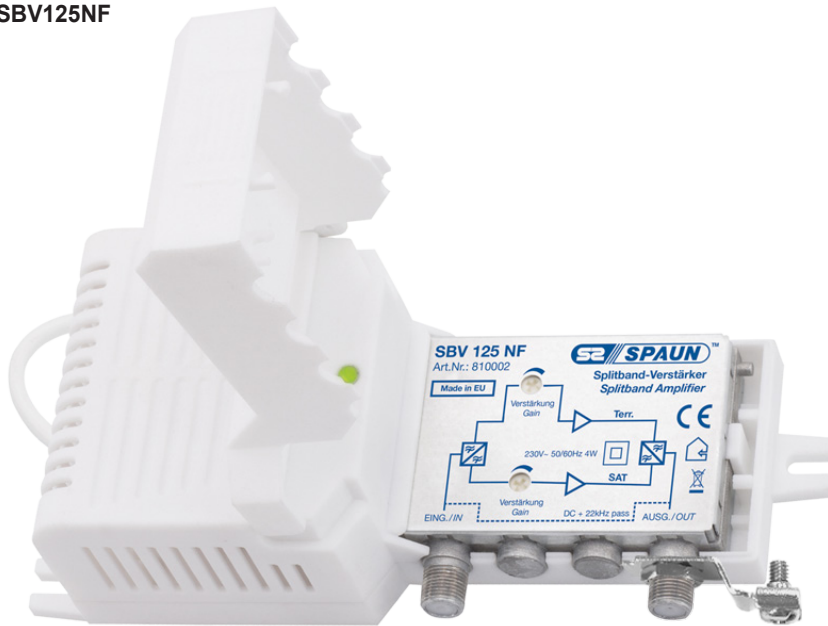

This splitband amplifier has been specifically designed to accommodate the amplifying requirements of the multistacker in commercial applications.

FEATURES

- Small wall mountable design, simple installation
- High quality housing
- Integrated Level Adjuster for Satellite & Terrestrial
- Grounding screw for CET [Earthing]

Specifications

Input / Output	1 / 1
Gain Terr RF: 47 ... 862 MHz	14 ... 18 dB \pm 1 dB
Gain Sat IF: 950 ... 2400 MHz	18 ... 25 dB \pm 1 dB
Output Level Max. 47 ... 862 MHz 60 dB IMA ₃ / EN 60728 - 3	Typ. 104 dB μ V
Output Level Max. 950 ... 2400 MHz 60 dB IMA ₃ / EN 60728 - 3	Typ. 113 dB μ V
Level Adjusting Range: Terr RF	0 ... - 15 dB
Level Adjusting Range: Sat IF	0 ... - 10 dB
DC Pass	Max. 20 V / 400 mA
Operating Voltage	230 V, 50 / 60 Hz
Power Consumption	4 W Max.
Ambient Temperature	- 20 ... + 50 °C
Dimensions [mm]	175 x 75 x 50